

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



01 APR 2005

(43) International publication date

23 October 2003 (23.10.2003)

PCT

(10) International publication number

WO 03/087659 A2

(51) International patent classification⁷:

F21V

(21) International application number:

PCT/DE03/01163

(22) International filing date:

9 April 2003 (09.04.2003)

(25) Language of filing:

German

(26) Language of publication:

German

(30) Data relating to the priority:

102 15 744.8

10 April 2002 (10.04.2002)

DE

(71) Applicant (for all designated States except US):
GRIMMEISEN VERTRIEBS GMBH [DE/DE]; Äussere Lohse
2, 83512 Wasserburg a. Inn (DE).

(72) Inventor; and

(75) Inventor/Applicant (US only): GRIMMEISEN,
Gerhard [DE/DE]; Voglberg 13, 83527 Haag i. OB
(DE).

(81) Designated states (national): AE, CN, US.

(84) Designated states (regional): European patent (AT,
BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,
GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR).

Declarations under Rule 4.17:


- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

[continued on next page]

As printed

(54) Title: FLAT LIGHTING FIXTURE

(54) Bezeichnung: FLACHE LEUCHTE

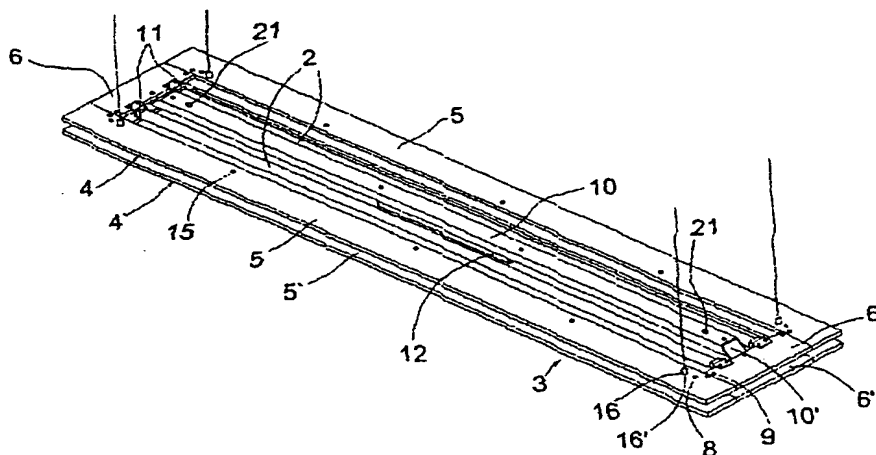

(57) Abstract: The invention relates to a multifunctional lighting fixture (1) having at least one fluorescent lamp (2) mounted inside a flat lighting fixture housing (3) comprised of two rectangular frames (4, 4'). Each frame consists of preferably only one lateral wing (5, 5a, 5', 5a') running parallel to the fluorescent lamp (2), and front wings (6, 6a, 6', 6a') situated therebetween, whereby spacer elements (8) and edged spacer edge connectors (9) hold the lateral wings and front wings of both frames at a predetermined distance. The lighting fixture can be combined in many ways both during initial assembly as well as for a subsequent conversion and can be assembled in the form of a built-on lamp or suspended lamp, a vertically or horizontally mounted wall lamp, floor lamp, standing lamp or cable lighting fixture without modifying the base body of the lighting fixture. In addition, different light distributing elements can be used in an exchangeable manner so that the light is both directly oriented onto a useful surface as well as deflected in an indirect and preferably colored manner. Additional light sources, e.g. high-voltage halogen spotlights can be freely attached. The lighting fixture constitutes, with standardized elements, a flat light fixture design that is, on the whole, aesthetically appealing.

WO 03/087659 A2

[continued on next page]